





# ORGANIC TOUCH

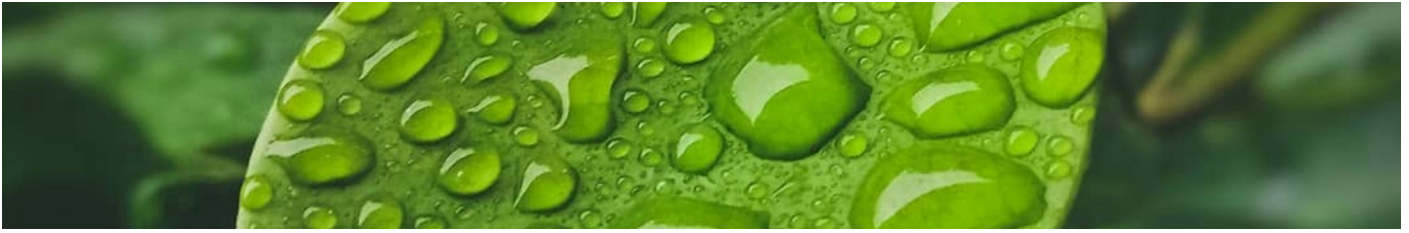

## BIO-HAPTIC, WATERBORNE

- / Paint system can be used as 1-Layer (TPE/TPO)
- / 2-Layer (primer/topcoat) on PC/ABS
- / Standard market price level
- / More than 30 % bio-based content in the topcoat
- / Increasing by use of sustainable hardener
- / Renewable carbon origins in bio-waste materials and is therefore not in competition to food-production or any rain-forests
- / Can be applied on standard painting lines

>30% renewable raw materials  
 ≈  
 350 g/kg less CO<sub>2</sub>Eq.

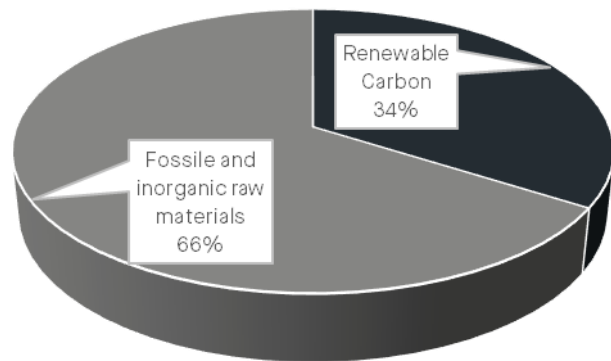

## SUSTAINABILITY

Product		Renewable raw-material content / %						CO <sub>2</sub> Eq. / kg CO <sub>2</sub> per kg product	
		Coating		Coating + fossile Hardener		Coating + ECO-Hardener		CCF	PCF
Number	Name	liquid	solid	liquid	solid	liquid	solid		
5270	PEHABIN BIO 2C HY TP	13	34	11	27	18	40	0,8	5,8